
PE Jaw Crushers

PE-JC

Jaw crushers are mainly used as primary crushers. Their main purpose is to reduce rocks to smaller sizes for the next crushing stages. Jaw crushers are a popular alternative to primary gyratory crushers, since they can process large amounts of hard material efficiently. Due to their smaller physical size, jaw crushers are also ideal for tight spaces, such as underground mining and mobile crushing applications.

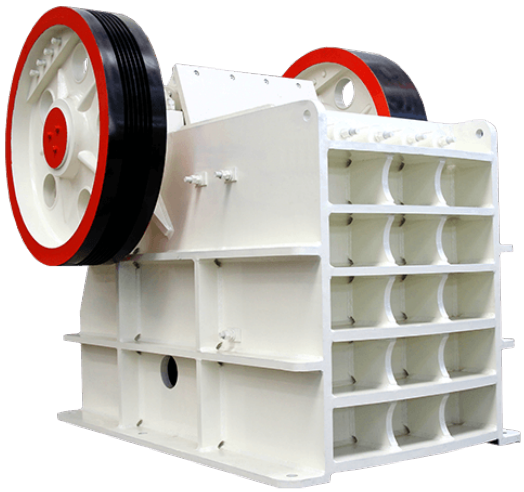

Jaw crushers are always at the for front of the sample preparation chain, pre-crushing all hard and brittle materials. They are primary used in the Laboratories and Pilot Plants operating under rough conditions for on-line quality control of raw materials.

Specs

PE150x250	
Size of Feed	150 x 250mm
Max Feeding Size	125mm
Adjustable Size if Discharge Opening	10 - 40mm
Capacity	1 - 3t/h
Power	5.5kW
PE150x750	
Size of Feed	150 x 750mm
Max Feeding Size	125mm
Adjustable Size if Discharge Opening	10 - 40mm
Capacity	5 - 16mm
Power	15kW
PE250x400	

Size of Feed	250 x 400mm
Max Feeding Size	210mm
Adjustable Size if Discharge Opening	20 - 60mm
Capacity	5 - 20t/h
Power	15kW
PE400x600	
Size of Feed	400 x 600mm
Max Feeding Size	350mm
Adjustable Size if Discharge Opening	40 - 100mm
Capacity	16 - 65t/h
Power	30kW
PE500x700	
Size of Feed	500 x 700mm
Max Feeding Size	425mm
Adjustable Size if Discharge Opening	50 - 100mm
Capacity	45 - 100t/h
Power	55kW
PE600x900	
Size of Feed	600 x 900mm
Max Feeding Size	500mm
Adjustable Size if Discharge Opening	65 - 140mm
Capacity	60 - 160t/h
Power	75kW
PE750x1060	
Size of Feed	750 x 1060mm
Max Feeding Size	360mm
Adjustable Size if Discharge Opening	80 - 160mm

Capacity	90 - 320t/h
Power	110kW
PEW800x1060	
Size of Feed	800 x 1060mm
Max Feeding Size	640mm
Adjustable Size if Discharge Opening	80 - 200mm
Capacity	110 - 350t/h
Power	110kW
PE900x1200	
Size of Feed	900 x 1200mm
Max Feeding Size	750mm
Adjustable Size if Discharge Opening	95 - 210mm
Capacity	140 - 450t/h
Power	130kW
PEW1000x1200	
Size of Feed	1000 x 1200mm
Max Feeding Size	850mm
Adjustable Size if Discharge Opening	110 - 235mm
Capacity	16 - 550t/h
Power	160kW
PE1200x1500	
Size of Feed	1200 x 1500mm
Max Feeding Size	1020mm
Adjustable Size if Discharge Opening	150 - 300mm
Capacity	400 - 800t/h
Power	220kW
PEW1500x1800	

Size of Feed	1500 x 1800mm
Max Feeding Size	1200mm
Adjustable Size if Discharge Opening	210 - 360mm
Capacity	520 - 1100t/h
Power	280kW
PEW250x750	
Size of Feed	250 x 750mm
Max Feeding Size	210mm
Adjustable Size if Discharge Opening	25 - 60mm
Capacity	15 - 30t/h
Power	22kW
Size of Feed	250 x 1000mm
PE250x1000	
Max Feeding Size	210mm
Adjustable Size if Discharge Opening	25 - 60mm
Capacity	16 - 52t/h
Power	30kW
PEW250x1200	
Size of Feed	250 x 1200mm
Max Feeding Size	210mm
Adjustable Size if Discharge Opening	25 - 60mm
Capacity	20 - 65t/h
Power	37kW
PEW300x1300	
Size of Feed	300 x 1300mm
Max Feeding Size	250mm
Adjustable Size if Discharge Opening	25 - 70mm

Tel: +27 78 457 3557 • Email: Danny.scholtz@revaro.co za • WhatsApp/Cell:
Visit us atMiddelburg Industrial Park, Bethal Road / N4, Vaalbank, Middelburg, 1050

A member of the REVARO® Group of Companies

Capacity	25 - 90t/h
Power	55kW